

abitana



- 3 Compatible abitana products ABI-CX1002 ABI-KX1002 4 Termination Steps Trim off outer jacket, and strip center conductor as shown with 1. cable stripping tool. 6,25mm 8.3mm 2 turns Push the connector on the cable. Check the differerent items before 2. crimping the connector. jacket center conductor isolation coplanar center conductor grounding sleeve · Push the grounding sleeve between the jacket and the outer foil. • The cable is deep enough inserted when the front of the center conductor isolation is co-planar with the inner front of the connector
- Fix the F-female adaptor firmly with it's short side in the connector. Then slide the connector assembly in the plastic holder and fix it firmly with the supplied nut.

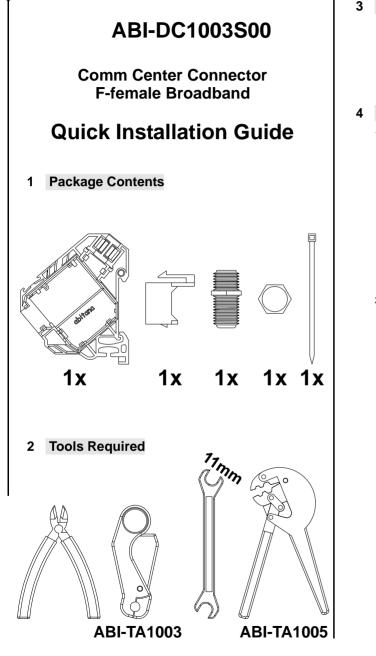

4. Click the terminated connector in the DIN-Rail-Adaptor and fix the cable with the clips and a tie-wrap

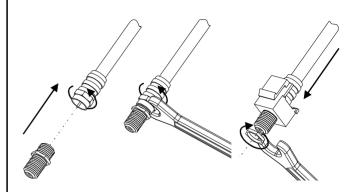